GERMAN FLOOR CERAMICS





Made in Germany.
FASCINATION
MADE OF
CLAY.
Since 1884.

SAFE AND DURABLE permanently installed ON YOUR BALCONY. AND TERRACE.



For perfect frost resistance and installation safety:

OUTDOOR FUNCTIONALITY IN DETAIL



Outdoor functional ceramics



Frost resistance 25 year guarantee*



Mechanical adhesive qualities for a safe and permanent bonding.



Ideal for renovations of balconies, terraces and outdoor stairs.



For a perfect floor concept. Stairs, steps and edge finishes.




Sustainable building material.



Energy-efficiently manufactured.

IDEAL TENSILE ADHESION PROPERTIES


The marked structure of the reverse side that comes from the production process, in which wet clay is extruded to produce coarse ceramics, allows for optimal contact with the substrate and therefore the best possible tensile adhesion. (REM image at 500×10^{-5} magnification – direct plan view).

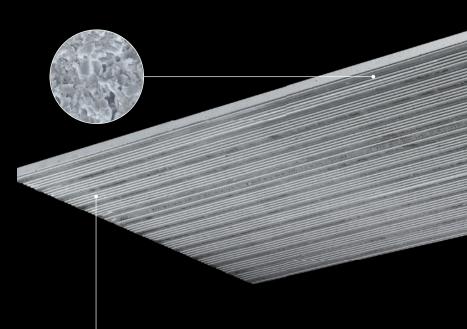



On selected products: Frost resistance 25 year guarantee*


* Ströher grants a 25-year guarantee on frost resistance for the following selected coarse ceramic products and series when laid professionally by a qualified specialist company: Roccia Next, Selected, Gravel Blend, Epos, Aera, Roccia, Terra, Stalotec, Farbklang, Nuancist, Brickwerk, Wasserbrand, Kontur, Riegel 50, Steinlinge, Glanzstücke, Zeitlos und Keravette.



FUNCTIONALLY ENHANCED CERAMIC WITH MEMBRANE EFFECT

Thanks to the manufacturing method using extrusion, Ströher ceramics have a 'weather-proof' pore structure involving capillary channels that allow the material to 'breathe' as well as a homogeneous particulate structure that promotes drainage. Even the smallest amount of condensation can escape naturally. We call this the membrane effect.



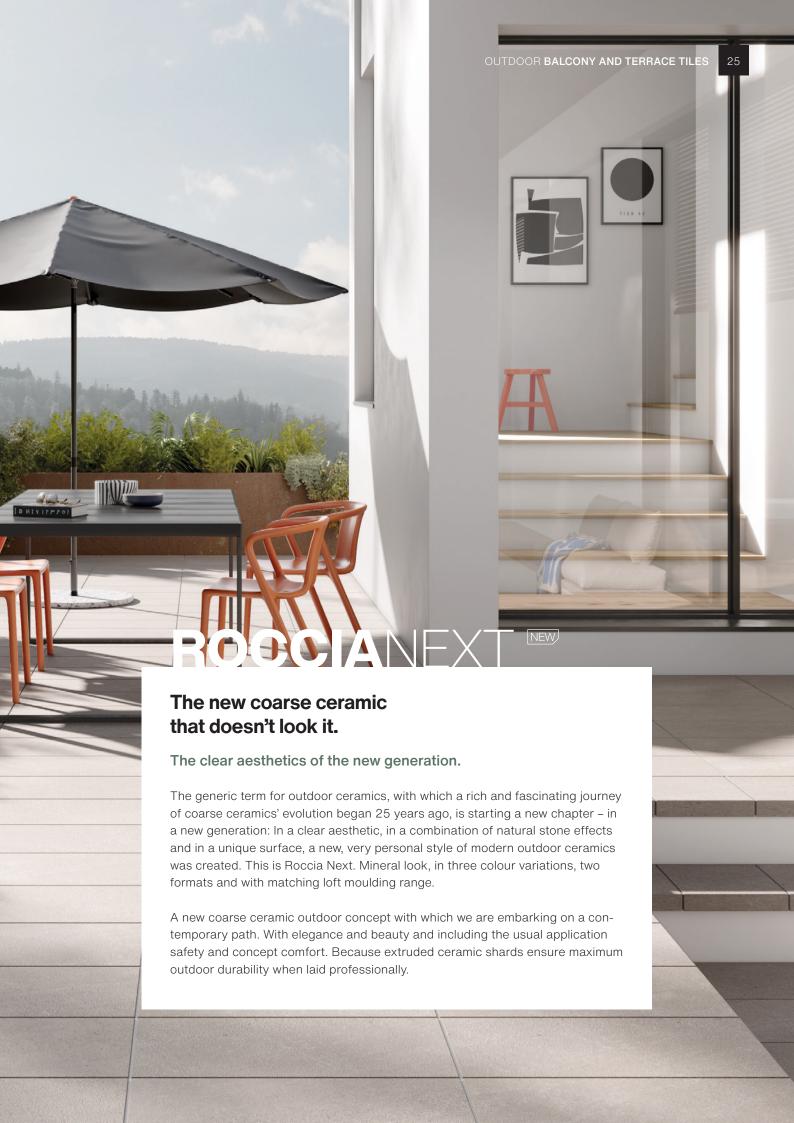

ROCCIANEXT NEW



Natural. Aesthetic. Functional.



2573 light grey



2542 taupe



2514 greige







































Frost resistance 25 year guarantee*



Mechanical adhesive qualities for a safe and permanent bonding.



Ideal for renovations of balconies, terraces and outdoor stairs.



For a perfect floor concept. Stairs, steps and edge finishes.



Sustainable Energy-efficiently building material.



ROCCIANEXT product details


DIN EN 14411 stoneware tile, extruded test result precision

toot roourt prov													
		EY	TRUDED	EY	TRUDED	< 10	FT ANGLE TILE 2)	< 101	FT STAIR	SK [IRTING	PIS	ER CORNER
			ONEWARE TILE		ONEWARE TILE	LOI	TANGEL HEL		EAD TILE 2)3)	JIV	iiiiiiii	TIIC	LII OOIIIVLII
NOMINAL SIZE	IN CM	30	x 30	30	x 60	30		30		30		-	
PRODUCTION	SIZE IN MM	29	4 x 294 x 10	29	4 x 594 x 10	294	4 x 175 x 52 x 10	294	4 x 340 x 35 x 11	29	4 x 70 x 10	157	x 52 x 52 x 10
SLIP RESISTAN	NCE	R 1	0/A	R 1	0/A	R 1	0/A	R 1	0/A	-		-	
LOAD GROUP		5		5		5		5		-		-	
CALIBRATED		no		yes	1	no		yes	1	no		yes	
COLOUR		PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE
2573 L	IGHT GREY		95062-002		95062-005		95062-008		95062-011		95062-014		95062-017
2514 0	2514 GREIGE		95062-003	□ 95062-006		675	95062-009	296	95062-012	55	95062-015	80	95062-018
2542 1	TAUPE		95062-004		95062-007		95062-010		95062-013		95062-016		95062-019
PIECE	kg	1,7	06	3,7	54	1,52	26	2,7	40	0,4	21	0,4	00
	Piece	11		6		6		4		16		2	
BUNDLE	m²/lm	1,0	0	1,0	9	1,82	2	1,2	1	4,8	35	-	
	kg	18,	766	22,	524	9,15	56	10,	960	6,7	36	0,8	00
	Piece	572	2	240	0	192)	100)	2.8	880	1.70)4
PALLET	m²/lm	52,	,00	43,	64	58,	18	30,	30	87	2,73	-	
PALLET	kg	976	ô	90	1	293	3	274	1	1.2	12	682	2
	Bundle	52		40		32		25		180)	852	<u>)</u>
M²/LM	Piece (incl. joint)	11,0	00	5,5	0	3,3	0	3,3	0	3,3	30	-	
IVI-/ LIVI	kg	18,	766	20,	647	5,0	36	9,0	42	1,3	89	-	
DISCOUNT ON	PALLETS	yes	3	yes		yes		yes		no		no	
SURCHARGE 1)	yes	3	yes	;	yes	1	no		yes	3	no	

PG = Price group (please see price list 2023) 1 = Minimum quantity: each open box will incur a surcharge. 2 = The marked trim pieces are to be used in accordance with the applicable instructions for use from Ströher GmbH as well as applicable standards and informational leaflets. For further information please see catalogue page 66 or visit our website under www.stroeher.de. 3 = The 340 mm tread depth of the loft stair tread corner and tread tile allows flexible use and adjustment, even for non-standard stairs.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

^{*} Ströher grants a 25-year guarantee on frost resistance for the following selected coarse ceramic products and series when laid professionally by a qualified specialist company: Roccia Next, Selected, Gravel Blend, Epos, Aera, Roccia, Terra, Stalotec, Farbklang, Nuancist, Brickwerk, Wasserbrand, Kontur, Riegel 50, Steinlinge, Glanzstücke, Zeitlos und Keravette.

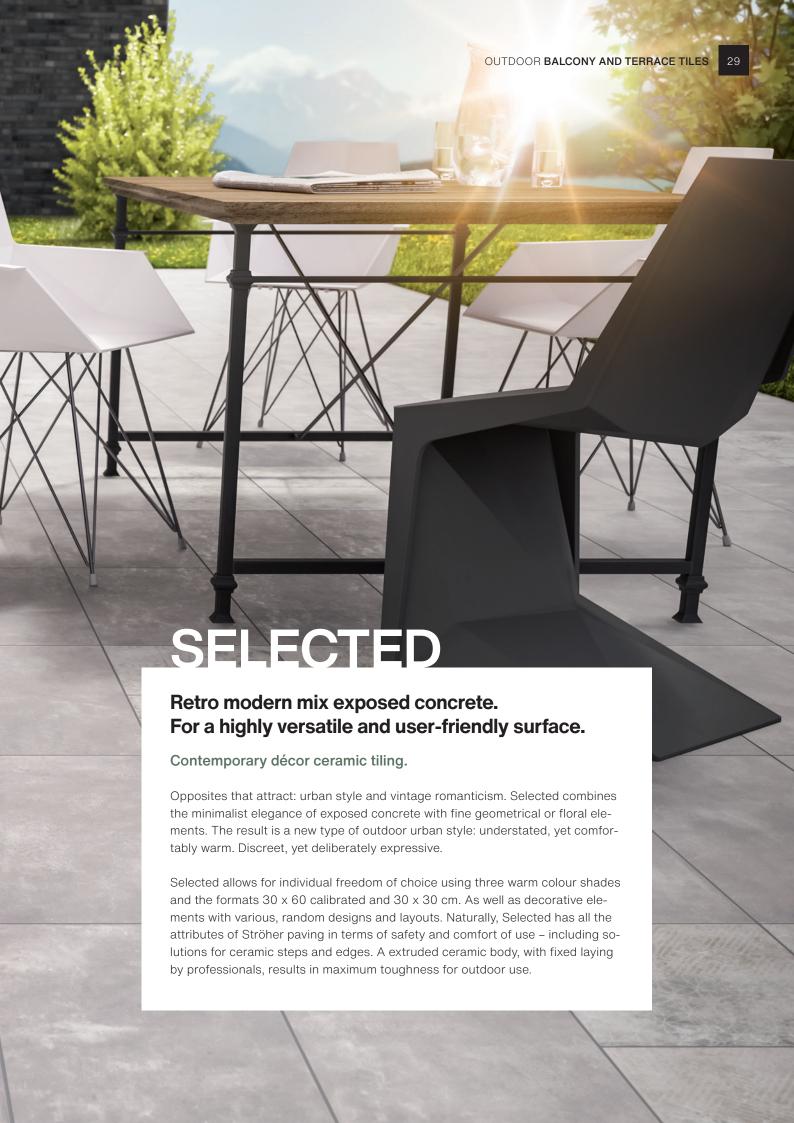

SELECTED



Contemporary. Retro modern. Functional.



4673 grey



4684 anthracite



4612 greige



4691 decor



































Frost resistance 25 year guarantee*



Mechanical adhesive qualities for a safe and permanent bonding.



Ideal for renovations of balconies, terraces and outdoor stairs.



For a perfect floor concept. Stairs, steps and edge finishes.



Sustainable Energy-efficiently building material.



SELECTED product details

DIN EN 14411 stoneware tile, extruded test result precision

test result precision								
		EXTRUDED STONEWARE TILE	EXTRUDED STONEWARE TILE	LOFT ANGLE TILE 2)	LOFT STAIR TREAD TILE ^{2) 3)}	LOFT STAIR TREAD CORNER ^{2) 3)}	SKIRTING	RISER CORNER
NOMINAL SIZE IN CM	3	30 x 30	30 x 60	30	30	30	30	-
PRODUCTION SIZE IN	MM 2	94 x 294 x 10	294 x 594 x 10	294 x 175 x 52 x 10	294 x 340 x 35 x 11	340 x 340 x 35 x 11	294 x 70 x 10	157 x 52 x 52 x 10
SLIP RESISTANCE	R	R 10/A	R 10/A	R 10/A	R 10/A	R 10/A	-	-
LOAD GROUP	5	j	5	5	5	5	-	-
CALIBRATED	n	10	yes	no	yes	yes	no	yes
COLOUR	PO	G ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE
4673 GREY		95053-002	95053-006	95053-009	95053-012	95053-015	95053-021	95053-024
4612 GREIGE	1	95053-003	95053-007	95053-010	95053-013	€ 95053-016	당 95053-022	8 95053-025
4684 ANTHRA	ACITE	95053-004	95053-008	95053-011	95053-014	95053-017	95053-023	95053-026
4691 DECOR	33	95053-005						
PIECE kg	1,	,706	3,754	1,526	2,740	3,718	0,421	0,400
Piece	1		6	6	4	1	16	2
BUNDLE m ² /lm		,00	1,09	1,82	1,21	-	4,85	-
kg		8,766	22,524	9,156	10,960	3,718	6,736	0,800
Piece	5	572	240	192	100	78	2.880	1.704
m²/lm PALLET	5	52,00	43,64	58,18	30,30	-	872,73	-
kg	9	976	901	293	274	290	1.212	682
Bundle	e 5	52	40	32	25	78	180	852
Piece M²/LM	(incl. joint) 1	1,00	5,50	3,30	3,30	-	3,30	-
kg	1	8,766	20,647	5,036	9,042	-	1,389	-
DISCOUNT ON PALLE	TS y	es	yes	yes	yes	no	no	no
SURCHARGE 1)	у	es	yes	yes	no	no	yes	no

PG = Price group (please see price list 2023) 1 = Minimum quantity: each open box will incur a surcharge. 2 = The marked trim pieces are to be used in accordance with the applicable instructions for use from Ströher GmbH as well as applicable standards and informational leaflets. For further information please see catalogue page 66 or visit our website under www.stroeher.de ³⁾ = The 340 mm tread depth of the loft stair tread corner and tread tile allows flexible use and adjustment, even for non-standard stairs.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

^{*} Ströher grants a 25-year guarantee on frost resistance for the following selected coarse ceramic products and series when laid professionally by a qualified specialist company: Roccia Next, Selected, Gravel Blend, Epos, Aera, Roccia, Terra, Stalotec, Farbklang, Nuancist, Brickwerk, Wasserbrand, Kontur, Riegel 50, Steinlinge, Glanzstücke, Zeitlos und Keravette.



GRAVEL BLEND

THIRD-PARTY VERIFIED EPD ISO 14025 and EN 15804

Trendy. Archaic. Extruded.



3615 beige



3648 taupe



3644 brown



3675 grey



3687 black



































Frost resistance 25 year guarantee*



Mechanical adhesive qualities for a safe and permanent bonding.



Ideal for renovations of balconies, terraces and outdoor stairs.



For a perfect floor concept. Stairs, steps and edge finishes.



Sustainable Energy-efficiently building material.



GRAVEL BLEND product details


DIN EN 14411 stoneware tile, extruded test result precision

test result pi	ecision		TRUDED DNEWARE TILE		TRUDED ONEWARE TILE	€ LOI	FT ANGLE TILE 2)		FT STAIR EAD TILE ^{2] 3)}		FT STAIR EAD CORNER 2) 3)	[SK	IIRTING	RIS	ER CORNER
NOMINAL S	IZE IN CM	30	x 30	30	x 60	30		30		30		30		-	
PRODUCTIO	ON SIZE IN MM	29	4 x 294 x 10	29	4 x 594 x 10	294 x 175 x 52 x 10		294 x 340 x 35 x 11		340 x 340 x 35 x 11		294 x 70 x 10		157	x 52 x 52 x 10
SLIP RESIST	ANCE	R 1	0/A	R 1	0/A	R 10/A		R 10/A		R 10/A		-		-	
LOAD GROU	IP	5 4		5 4)		5 4)		5 4)		5 4)		-		-	
CALIBRATE	D	no		yes	3	no		yes		yes		no		yes	
COLOUR		PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE
3615	5 BEIGE		95040-002		95040-007		95040-012		95040-022		95040-027		95040-037		95040-042
364	4 BROWN		95040-003		95040-008		95040-013		95040-023		95040-028		95040-038		95040-043
367	5 GREY	12	95040-004	414	95040-009	675	95040-014	296	95040-024	113	95040-029	55	95040-039	80	95040-044
368	7 BLACK 4)		95040-005		95040-010		95040-015		95040-025		95040-030		95040-040		95040-045
364	8 TAUPE		95040-006		95040-011		95040-016		95040-026		95040-031		95040-041		95040-046
PIECE	kg	1,7	06	3,7	54	1,5	26	2,7	740	3,7	18	0,4	121	0,4	00
	Piece	11		6		6		4		1		16		2	
BUNDLE	m²/lm	1,0	0	1,0	9	1,8	2	1,2	1	-		4,8	35	-	
	kg	18,	766	22	524	9,1	56	10,	960	3,7	'18	6,7	736	0,8	00
	Piece	572	2	24	0	192	2	10	0	78		2.8	380	1.70)4
PALLET	m²/lm	52,	00	43	64	58,	,18	30	,30	-		87	2,73	-	
171221	kg	976	6	90	1	29	3	27	4	29	0	1.2	12	68) -
	Bundle	52		40		32		25		78		18	0	85)
M ² /LM	Piece (incl. joint)	11,(5,5		3,3		3,3		-		3,3		-	
	kg	18,	766		647	5,0		9,0)42	-		1,3		_	
	ON PALLETS	yes		yes		yes		yes		no		no		no	
SURCHARG	E 1)	yes		yes	S	yes	S	no		no		yes	S	no	

PG = Price group (please see price list 2023) 1) = Minimum quantity: each open box will incur a surcharge. 2) = The marked trim pieces are to be used in accordance with the applicable instructions for use from Ströher GmbH as well as applicable standards and informational leaflets. For further information please see catalogue page 66 or visit our website under www.stroeher.de 3 = The 340 mm tread depth of the loft stair tread corner and tread tile allows flexible use and adjustment, even for non-standard stairs. 4) = Colour 3687 black meets loadgroup 4.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

^{*} Ströher grants a 25-year guarantee on frost resistance for the following selected coarse ceramic products and series when laid professionally by a qualified specialist company: Roccia Next, Selected, Gravel Blend, Epos, Aera, Roccia, Terra, Stalotec, Farbklang, Nuancist, Brickwerk, Wasserbrand, Kontur, Riegel 50, Steinlinge, Glanzstücke, Zeitlos und Keravette.

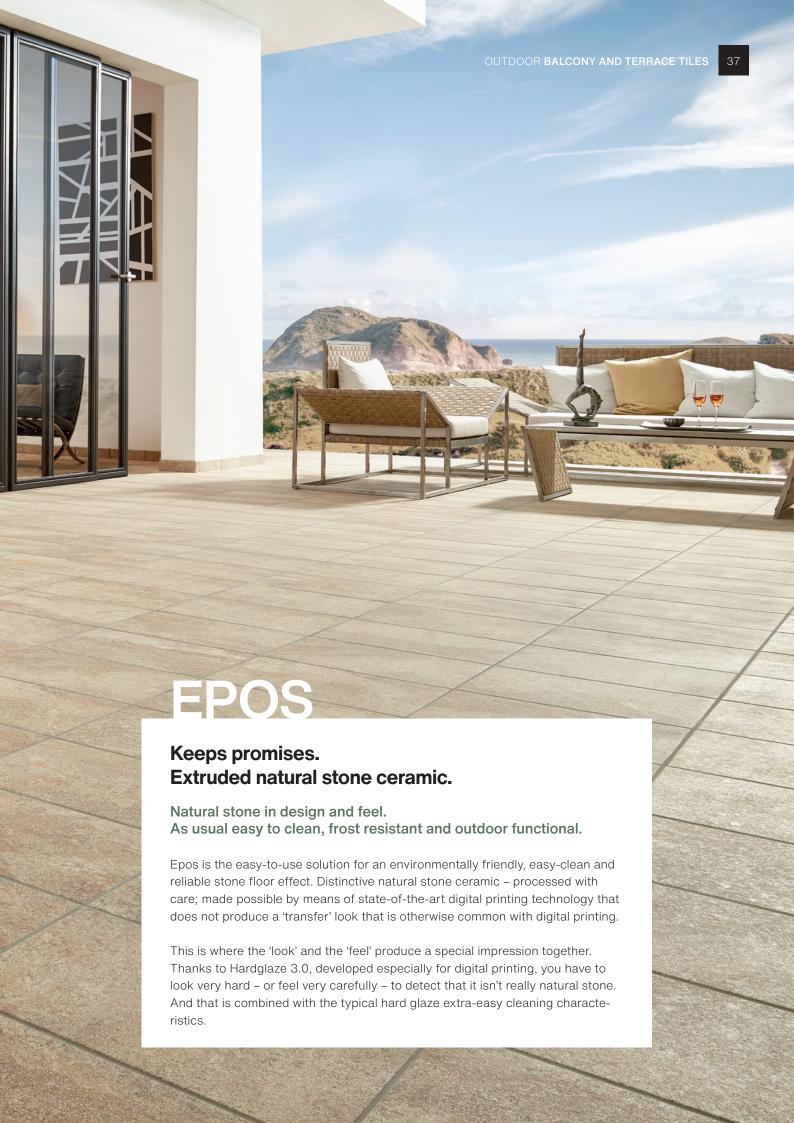







Frost resistance 25 year guarantee*



Mechanical adhesive qualities for a safe and permanent bonding.



Ideal for renovations of balconies, terraces and outdoor stairs.



For a perfect floor concept. Stairs, steps and edge finishes.



Sustainable Energy-efficiently building material.



EPOS product details

DIN EN 14411 stoneware tile, extruded test result precision

test result prec	ision							<		<		\leq	
			TRUDED ONEWARE TILE		TRUDED ONEWARE TILE		TRUDED ONEWARE TILE	LOF	T ANGLE TILE 2)		FT STAIR EAD TILE ^{2) 3)}		FT STAIR EAD CORNER ^{2) 3)}
NOMINAL SIZE	IN CM	30	x 30	30	x 45	30	x 60	30		30		30	
PRODUCTION	SIZE IN MM	29	4 x 294 x 10	29	4 x 444 x 10	29	4 x 594 x 10	294	4 x 175 x 52 x 10	29	4 x 340 x 35 x 11	340	0 x 340 x 35 x 11
SLIP RESISTAN	NCE	R 1	0/A	R 1	0/A	R 1	0/A	R 1	0/A	R 1	0/A	R 1	0/A
LOAD GROUP		5		5		5		5		5		5	
CALIBRATED		no		no		no		no		yes	;	yes	i
COLOUR		PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE
2671 K	RIOS		95028-002		95028-006	412	95028-010		95028-012		95028-020		95028-024
2676 F	PIDRA	12	95028-003	367	95028-007	4	95028-011	22	95028-013	296	95028-021	113	95028-025
2615 E	RES	_	95028-004	36	95028-008			67	95028-014	96	95028-022	=	95028-026
2644 I	KAWE		95028-005		95028-009				95028-015		95028-023		95028-027
PIECE	kg	1,7	06	2,7	85	3,7	33	1,5	26	2,7	40	3,7	18
	Piece	11		6		6		6		4		1	
BUNDLE	m²/lm	1,0	0	0,8	31	1,0	9	1,8	2	1,2	1	-	
	kg	18,	766	16,	710	22,	398	9,15	56	10,	960	3,7	18
	Piece	57	2	312	2	240)	192		100)	78	
PALLET	m²/lm	52	,00	42	,11	43,	64	58,	18	30,	30	-	
TALLET	kg	97	ô	86	9	89	6	293	3	274	1	290)
	Bundle	52		52		40		32		25		78	
M ² /LM	Piece (incl. joint)	11,0	00	7,4	1	5,5	0	3,3	0	3,3	0	-	
	kg	18,	766	20	,637	20,	532	5,0	36	9,0	42	-	
DISCOUNT ON	PALLETS	yes	3	yes	3	yes		yes		yes		no	
SURCHARGE 1)	yes	S	yes	S	yes		yes		no		no	

PG = Price group (please see price list 2023) 19 = Minimum quantity: each open box will incur a surcharge. 21 = The marked trim pieces are to be used in accordance with the applicable instructions for use from Ströher GmbH as well as applicable standards and informational leaflets. For further information please see catalogue page 66 or visit our website under www.stroeher.de 3) = The 340 mm tread depth of the loft stair tread corner and tread tile allows flexible use and adjustment, even for non-standard stairs.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

* Ströher grants a 25-year guarantee on frost resistance for the following selected coarse ceramic products and series when laid professionally by a qualified specialist company: Roccia Next, Selected, Gravel Blend, Epos, Aera, Roccia, Terra, Stalotec, Farbklang, Nuancist, Brickwerk, Wasserbrand, Kontur, Riegel 50, Steinlinge, Glanzstücke, Zeitlos und







hard glaze

Variety of trim pieces



Easy maintenance

and hygienic



resistant















Resistant to





Anti-static

EPOS



Reliable. Deceptively genuine-looking. Distinctive.

Colours



2671 krios

SKIRTING

294 x 70 x 10

PG ARTICLE

95028-036

95028-037

95028-038

95028-039

0,421

2.880 872,73 1.212

3,30 1,389 no yes

16 4,85 6,736

30

RISER CORNER

157 x 52 x 52 x 10

PG ARTICLE

95028-040

95028-041

95028-042

95028-043

0,400

0,800

682

no

2



2676 pidra



2615 eres



2644 kawe



AERA



Frost-resistant. Slip-proof. Confidently stylish.



1471 baccar



1475 crio



1414 faveo



1415 pinar



1473 betone



1485 anthra



1425 camaro





Frost resistance 25 year guarantee*



Mechanical adhesive qualities for a safe and permanent bonding.



Ideal for renovations of balconies, terraces and outdoor stairs.



For a perfect floor concept.
Stairs, steps and edge finishes.



Sustainable Energy-efficiently building material.



AERA product details

DIN EN 14411 stoneware tile, extruded

	ult precision														
										\leq		\leq		\leq	
			TRUDED ONEWARE TILE		TRUDED ONEWARE TILE		TRUDED ONEWARE TILE	ST	AIR TREAD TILE	LO	FT ANGLE TILE 2)		FT STAIR EAD TILE ^{2) 3)}		FT STAIR EAD CORNER ^{2) 3)}
NOMI	NAL SIZE IN CM	30	x 30	30	x 45	30	x 60	30		30		30		30	
PROD	UCTION SIZE IN MM	29	4 x 294 x 10	29	4 x 444 x 10	29	4 x 594 x 10	29	4 x 300 x 10	29	4 x 175 x 52 x 10	29	4 x 340 x 35 x 11	34	0 x 340 x 35 x 11
SLIP F	RESISTANCE	R 1	10/A	R 1	0/A	R 1	0/A	R	10/A	R 1	0/A	R 1	0/A	R 1	0/A
LOAD	GROUP	5 4)	5 4)	5		5 4)	5 4)	5 4)	5 4)
CALIB	RATED	no		no		no		no		no		yes	3	ye	3
COLO	UR	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE
	1414 FAVEO		95016-007						95016-050		95016-030				
	1471 BACCAR		95016-005						95016-048		95016-028				
	1485 ANTHRA 4)		95016-004		95016-014				95016-047		95016-027		95016-071		95016-083
	1473 BETONE	10	95016-002		95016-012		95016-018	99	95016-045	675	95016-025	2:	95016-069	8	95016-081
	1425 CAMARO		95016-010	365	95016-017	2	95016-021		95016-053		95016-033	296	95016-072	113	95016-084
	1475 CRIO		95016-003		95016-013	412	95016-022		95016-046		95016-026		95016-070		95016-082
	1415 PINAR		95016-008		95016-016		95016-020		95016-051		95016-031				
PIECE	kg	1,7	06	2,7	85	3,7	'33	1,7	27	1,5	26	2,7	40	3,7	18
	Piece	11		6		6		10		6		4		1	
BUND	LE m²/lm	1,0	0	0,8	11	1,0	9	3,0	03	1,8	2	1,2	1	-	
	kg	18,	766	16,	710	22,	,398	17,	270	9,1	56	10,	960	3,7	18
	Piece	57	2	312	2	24	0	52	0	192	2	100)	78	
PALLE	m²/lm	52	,00	42	11	43	,64	15	7,58	58	,18	30	,30	-	
171222	kg	97	6	86	9	89	6	89	8	29	3	27	4	29	0
	Bundle	52		52		40		52		32		25		78	
M ² /LN	Piece (incl. joint)	11,0	00	7,4	1	5,5	50	3,3	30	3,3	30	3,3	30	-	
IVI / LIV	kg	18,	766	20	,637	20	,532	5,6	699	5,0	036	9,0	142	-	
DISCO	OUNT ON PALLETS	yes	3	yes	3	yes	S	ye	3	yes	S	yes	S	no	
SURCI	HARGE 1)	yes	3	yes	S	yes	S	ye	S	yes	S	no		no	

PG = Price group (please see price list 2023) 1 = Minimum quantity: each open box will incur a surcharge. 2 = The marked trim pieces are to be used in accordance with the applicable instructions for use from Ströher GmbH as well as applicable standards and informational leaflets. For further information please see catalogue page 66 or visit our website under www.stroeher.de ³⁾ = The 340 mm tread depth of the loft stair tread corner and tread tile allows flexible use and adjustment, even for non-standard stairs. 4) =Colour 1485 anthra meets loadgroup 4.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

^{*} Ströher grants a 25-year guarantee on frost resistance for the following selected coarse ceramic products and series when laid professionally by a qualified specialist company: Roccia Next, Selected, Gravel Blend, Epos, Aera, Roccia, Terra, Stalotec, Farbklang, Nuancist, Brickwerk, Wasserbrand, Kontur, Riegel 50, Steinlinge, Glanzstücke, Zeitlos und Keravette.

≤ ST/	AIR TREAD TILE	STAIR TREAD CORNER	SKIRTING	RISER CORNER	STAIR SKIRTING LEFT	STAIR SKIRTING RIGHT
30		30	30	-	-	-
294	4 x 340 x 12	345 x 345 x 12	294 x 70 x 10	157 x 52 x 52 x 10	294 x 70 x 10	294 x 70 x 10
R 1	0/A	R 10/A	-	-	-	-
5		5	-	-	-	-
no		no	no	yes	no	no
PG	ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE
98	95016-064 95016-062	95016-076 95016-074	95016-111 95016-110	95016-165 95016-163	95016-117 95016-116	95016-122 95016-121
			95016-109 \$\frac{1}{16}\$ 95016-107	95016-162		
	95016-067	95016-079	95016-114	95016-168	95016-119	95016-124
95	95016-061	≌ 95016-073	95016-108	95016-161	95016-115	95016-120
	95016-065	95016-077	95016-112	95016-166	95016-118	95016-123
3,0	06	4,372	0,421	0,400	0,682	0,682
4		1	16	2	8	8
1,2		-	4,85	-	-	-
	024	4,372	6,736	0,800	5,456	5,456
160		78	2.880	1.704	-	-
48,		-	872,73	-	-	-
48		341	1.212	682	-	-
40		78	180	852	-	-
3,3		-	3,30	-	-	-
9,9		-	1,389	-	-	-
yes	<u> </u>	no	no	no	no	no
no		no	yes	no	no	no





























Variety of trim pieces

Fade-free and Easy maintenance PEI 5 Abrasion colourfast and hygienic resistant

R 10/A Anti-slip

In compliance with DIN EN

Variety of accessories

Ecofriendly

Resistant to chemicals

Glow-resistant and fireproof



95016-180 Mosaic surface 1475 crio



95016-181 Mosaic surface 1425 camaro



95016-186 Mosaic surface 1425 multicoloured



95016-173 with 95016-175 AERA border II with corner piece Aera border II



95016-172 Inlay Fiora

AERA product details

DIN EN 14411 stoneware tile, extruded test result precision

		AERA BORDER	CORNER PIECE AERA BORDER II	INLAY FIORA	MOSAIC SURFACE
NOMINAL SI	ZE IN CM	30	-	60	30 x 30 (2,5 x 2,5)
PRODUCTIO	N SIZE IN MM	294 x 72 x 10	72 x 72 x 10	594 x 594 x 10	294 x 294 x 10
SLIP RESIST	ANCE	R 10/A	R 10/A	R 10/A	R 10/B
LOAD GROU	Р	5	5	5	5 ²⁾
CALIBRATED)	no	no	no	no
COLOUR		PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE
1485	5 ANTHRA ²⁾				95016-182
1473	BETONE				95016-183
1425	CAMARO				95016-181
1475	CRIO				95016-180
1415	PINAR				95016-187
1494	4 BORDER II	8 95016-173	8 95016-175		
1493	3 FIORA			95016-172	
1495	MULTICOLOURED				95016-186
PIECE	kg	0,400	0,200	7,600	1,500
	Piece	1	1	1	11
BUNDLE	m²/lm	0,30	-	-	1,00
	kg	0,400	0,200	7,600	16,500
	Piece	-	-	-	-
PALLET	m²/lm	-	-	-	-
IALLI	kg	-	-	-	-
	Bundle	-	-	-	
M²/LM	Piece (incl. joint)	3,30	-	-	11,00
	kg	1,320	-	-	16,500
DISCOUNT	ON PALLETS	no	no	no	no
SURCHARGE	E 1)	no	no	no	yes

PG = Price group (please see price list 2023) 1) = Minimum quantity: each open box will incur a surcharge. 2) = Colour 1485 anthra meets loadgroup 4.

 $\label{thm:continuous} The formats shown are illustrative drawings and are not binding. All information without guarantee.$

^{*} Ströher grants a 25-year guarantee on frost resistance for the following selected coarse ceramic products and series when laid professionally by a qualified specialist company: Roccia Next, Selected, Gravel Blend, Epos, Aera, Roccia, Terra, Stalotec, Farbklang, Nuancist, Brickwerk, Wasserbrand, Kontur, Riegel 50, Steinlinge, Glanzstücke, Zeitlos und Keravette.



ROCCIA



Frost resistant. Anti-slip. Relief-stressed.



1317 corda



1313 sandos



1328 rosso



1372 marmos



1376 grigio



1386 nero





































Frost resistance 25 year guarantee*



Mechanical adhesive qualities for a safe and permanent bonding.



Ideal for renovations of balconies, terraces and outdoor stairs.



For a perfect floor concept.
Stairs, steps and edge finishes.



Sustainable Energy-efficiently building material.



ROCCIA product details

DIN EN 14411 stoneware tile, extruded test result precision

			TRUDED ONEWARE TILE	ST	AIR TREAD TILE	€ LO	FT ANGLE TILE 2)	≤ ST.	AIR TREAD TILE		AIR TREAD PRINER	SK	CIRTING	RIS	SER CORNER
NOMINAL SIZ	'E IN CM	30	x 30	30		30		30		30		30		-	
PRODUCTION	I SIZE IN MM	29	4 x 294 x 10	29	4 x 300 x 10	29	4 x 175 x 52 x 10	29	4 x 340 x 12	34	5 x 345 x 12	29	4 x 70 x 10	157	7 x 52 x 52 x 10
SLIP RESISTA	NCE	R 1	10/A	R 1	0/A	R 1	0/A	R 1	0/A	R 1	0/A	-		-	
LOAD GROUP)	5		5		5		5		5		-		-	
CALIBRATED		no		no		no		no		no		no		yes	3
COLOUR		PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE
1317 (CORDA		95015-008		95015-043		95015-022		95015-063		95015-071		95015-103		95015-149
1386	NERO	10	95015-015	99	95015-044		95015-023	95	95015-064	105	95015-072	55	95015-104	80	95015-150
1376	GRIGIO		95015-013		95015-045	10	95015-024		95015-065		95015-073		95015-105		95015-151
1372	MARMOS		95015-011		95015-046	129	95015-025		95015-066		95015-074		95015-106		95015-152
1328	ROSSO	00	95015-014	65	95015-047		95015-026	94	95015-067	104	95015-075	54	95015-107	8/	95015-153
1313 :	SANDOS		95015-010		95015-048		95015-027		95015-068		95015-076		95015-108		95015-155
1391	OCTAGON														
1393	BORDER 08														
1394	BORDER 12														
PIECE	kg	1,7	06	1,7	 27	1,5	26	3,0	106	4,3	372	0,4	121	0,4	00
	Piece	11		10		6		4		1		16		2	
BUNDLE	m²/lm	1,0	0	3,0	13	1,8	2	1,2	1	-		4,8	35	-	
	kg	18,	,766	17,	270	9,1	56	12,	024	4,3	372	6,7	736	0,8	300
	Piece	57	2	52	0	192	2	160)	78		2.8	380	1.7	04
PALLET	m²/lm	52	,00	15	7,58	58	,18	48	,48	-		87	2,73	-	
	kg	97		89		29		48	1	34		1.2		68	
	Bundle	52		52		32		40		78		18		85	2
M ² /LM	Piece (incl. joint)	11,		3,3		3,3		3,3		-		3,3		-	
DIOCOLINE O	kg		,766		99	5,0			120	-			89		
DISCOUNT O		yes		yes		yes		yes		no		no		no	
SURCHARGE	7	yes	S	ye	5	yes	5	no		no		ye	S	no	

PG = Price group (please see price list 2023) 19 = Minimum quantity: each open box will incur a surcharge. 29 = The marked trim pieces are to be used in accordance with the applicable instructions for use from Ströher GmbH as well as applicable standards and informational leaflets. For further information please see catalogue page 66 or visit our website under www.stroeher.de

3) = The 340 mm tread depth of the loft stair tread corner and tread tile allows flexible use and adjustment, even for non-standard stairs. 4) = Not suitable for outdoor use due to natural stone inlays.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

^{*} Ströher grants a 25-year guarantee on frost resistance for the following selected coarse ceramic products and series when laid professionally by a qualified specialist company: Roccia Next, Selected, Gravel Blend, Epos, Aera, Roccia, Terra, Stalotec, Farbklang, Nuancist, Brickwerk, Wasserbrand, Kontur, Riegel 50, Steinlinge, Glanzstücke, Zeitlos und Keravette.



95015-158 Inlay Octagon



95015-166 Roccia triangle marmos




95015-168 Roccia border 08 ⁴⁾



95015-169 Roccia border 12

STAIR SKIRTING LEFT	STAIR SKIRTING RIGHT	INLAY OCTAGON	EDGE TILE	ROCCIA TRIANGLE MARMOS	ROCCIA BORDER 08 4)	ROCCIA BORDER
-	-	-	30	25	30	25
294 x 70 x 10	294 x 70 x 10	715	894 x 894 x 10	240 x 125 x 10	294 x 80 x 10	240 x 85 x 10
_	-	R 10/A	R 10/A	R 10/A	R 10/A	R 10/A
-	-	5	5	5	5	5
no	no	no	no	no	no	no
PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE
95015-109	95015-115		95015-160			
95015-110	95015-116		95015-161			
95015-111	95015-117		95015-162			
95015-112	95015-118		95015-163	⊜ 95015-166		
95015-113	2 95015-119		95015-164			
95015-114	95015-120		95015-165			
		95015-158			S 95015-168	
						∞ 95015-169
0,682	0,682	7,600	8,000	0,260	0,500	0,300
8	8	1	1	1	1	1
-	-	-	-	0,02	0,30	0,25
5,456	5,456	7,600	8,000	0,260	0,500	0,300
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	64.00	3 30	4.00
-	-	-	-	64,00 16,640	3,30 1,650	4,00 1,200
no	no	no	no	no	no	no

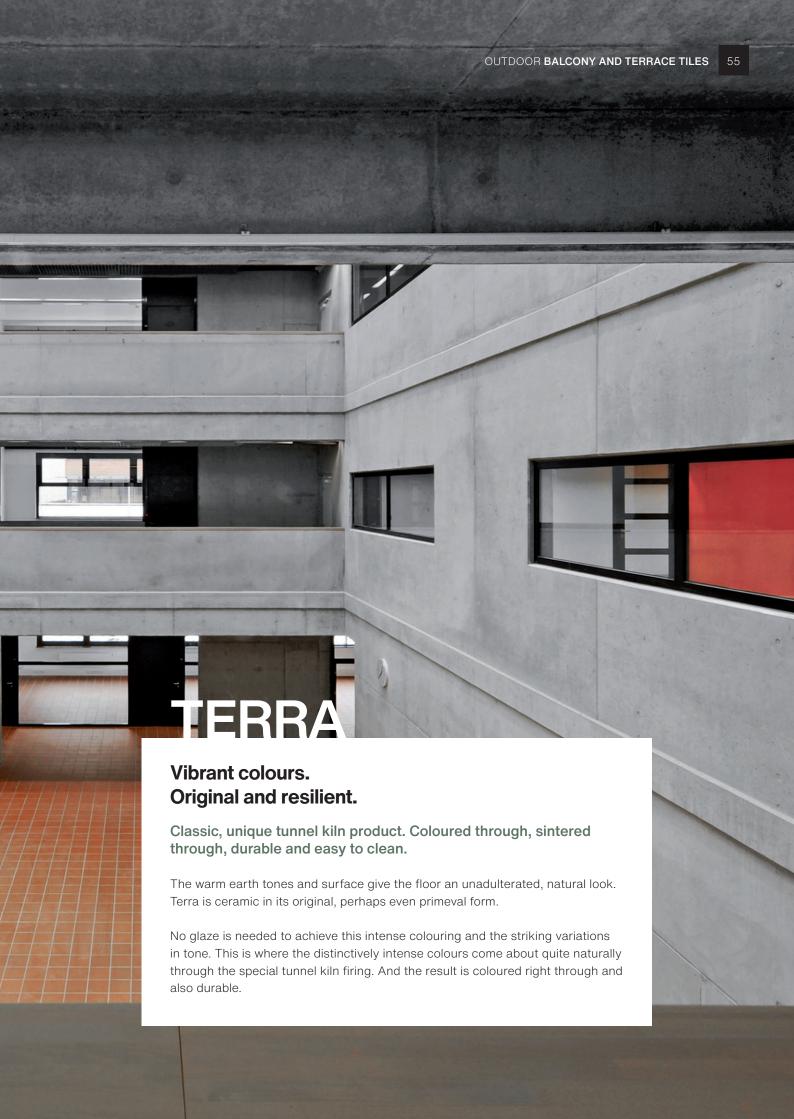





Frost resistance 25 year guarantee*



Mechanical adhesive qualities for a safe and permanent bonding.



Ideal for renovations of balconies, terraces and outdoor stairs.



For a perfect floor concept. Stairs, steps and edge finishes.



Sustainable Energy-efficiently building material.



TERRA product details

DIN EN 14411 stoneware tile, extruded test result precision

SLIP RESISTANCE R 11/B R 10 R			SPI	 LIT TILE	SPL	IT TILE	STA	AIR TREAD	STA	AIR TREAD .E	≪ AN	GLE TILE		GLE TILE WITH		GLE TILE LGING EDGE
SLIP RESISTANCE R 11/B R 10 R	NOMINAL SIZE IN (CM	12,	5 x 25	25	x 25	12,5	5	25		25		25		25	
LOAD GROUP ≤ 275 mm³ ≥ 5003-01 © 35003-010 © 35003-010	PRODUCTION SIZE	IN MM	115	x 240 x 10	240	x 240 x 12	115	x 300 x 14	24	0 x 300 x 14	240	0 x 115 x 52 x 10	240	0 x 115 x 52 x 10	24	0 x 115 x 52 x 10
CALIBRATED	SLIP RESISTANCE		R 1	1/B	R 1	/B	R 1	1/B	R 1	11/B	R 1	1/B	R 1	1/B	R 1	1/B
COLOUR PG ARTICLE	LOAD GROUP		≤ 2	?75 mm³	≤ 2	75 mm³	≤ 2	75 mm³	≤ 2	275 mm ³	≤ 2	75 mm³	≤ 2	75 mm³	≤ 2	75 mm³
O116 WHEAT 95103-002 95103-005 95103-005 95103-006 95003-010 95003-010 95003-014 95003-014 95003-015 95003-015 95003-015 95003-015 95003-016 ≥ 95003-016	CALIBRATED		no		no		no		no		no		no		no	
O127 PATRICIAN RED FLASHED — 95103-003 № 95103-006 № 95003-019 № 95003-021 № 95003-015 № 95003-016 № 95003-012 № 95003-016 № 95003-016 № 95003-016 № 95003-012 № 9500	COLOUR		PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE	PG	ARTICLE
PIECE kg 0,583 1,448 1,140 2,318 0,814 0,813 0,860 BUNDLE Piece 21 17 8 6 6 6 6 6 BUNDLE m²/lm 0,64 1,06 1,00 1,50 1,50 1,50 1,50 kg 12,243 24,616 9,120 13,908 4,884 4,878 5,160 PALLET m²/lm 47,73 31,88 60,00 96,00 171,00 171,00 171,00 171,00 M²/LM Piece (incl. joint) 33,00 16,00 8,00 4,00	0116 WHEAT	Г		95103-002		95103-005						95003-010		95003-014		
PIECE kg 0,583 1,448 1,140 2,318 0,814 0,813 0,860 BUNDLE Piece 21 17 8 6 6 6 6 6 BUNDLE m²/lm 0,64 1,06 1,00 1,50 4,884 4,878 5,160 84 684 684 684 684 684 684 684 684 684 684 684 684 684<	0127 PATRIC	CIAN RED FLASHED	—	95103-003	27	95103-006					63	95003-011	99	95003-015		
Piece 21 17 8 6 6 6 6 6 6 6 6 6	0125 PATRIC	CIAN RED		95103-004		95103-007	72	95003-019	69	95003-021		95003-012		95003-016	64	95003-018
BUNDLE m²/lm 0,64 1,06 1,00 1,50 1,50 1,50 1,50 kg 12,243 24,616 9,120 13,908 4,884 4,878 5,160 PALLET Piece 1.575 510 480 384 684 684 684 m²/lm 47,73 31,88 60,00 96,00 171,00 <td>PIECE kọ</td> <td>g</td> <th>0,5</th> <td>83</td> <td>1,44</td> <td>18</td> <td>1,14</td> <td>10</td> <td>2,3</td> <td>318</td> <td>0,8</td> <td>14</td> <td>0,8</td> <td>13</td> <td>0,8</td> <td>60</td>	PIECE kọ	g	0,5	83	1,44	18	1,14	10	2,3	318	0,8	14	0,8	13	0,8	60
kg 12,243 24,616 9,120 13,908 4,884 4,878 5,160 PALLET Piece 1.575 510 480 384 684 684 684 m²/Im 47,73 31,88 60,00 96,00 171,00	Pi	Piece	21		17		8		6		6		6		6	
Piece 1.575 510 480 384 684 684 684 684 m²/lm 47,73 31,88 60,00 96,00 171,	BUNDLE m	n²/lm	0,6	4	1,06	3	1,00	0	1,5	0	1,5	0	1,50	0	1,5)
PALLET m ² /lm 47,73 31,88 60,00 96,00 171,00	kį	g	12,	243	24,	616	9,12	20	13,	908	4,8	84	4,8	78	5,1	60
PALLET kg 918 738 547 890 557 556 588 Bundle 75 30 60 64 114 114 114 M²/LM Piece (incl. joint) 33,00 16,00 8,00 4,00 4,00 4,00 4,00 kg 19,239 23,168 9,120 9,272 3,256 3,252 3,440	Pi	Piece	1.5	75	510		480)	38	4	684	1	684	1	68	1
kg 918 738 547 890 557 556 588 Bundle 75 30 60 64 114 114 114 MP/LM Piece (incl. joint) 33,00 16,00 8,00 4,00 4,00 4,00 4,00 kg 19,239 23,168 9,120 9,272 3,256 3,252 3,440	DALLET	n²/lm	47,	73	31,8	38	60,	00	96,	,00	171	,00	171	,00	171	,00
M²/LM Piece (incl. joint) 33,00 16,00 8,00 4,0		g	918	3	738	1	547	7	89	0	55	7	556	3	588	
M ² /LM kg 19,239 23,168 9,120 9,272 3,256 3,252 3,440	В	Bundle	75		30		60		64		114		114		114	
kg 19,239 23,168 9,120 9,272 3,256 3,252 3,440	Pi Pi	Piece (incl. joint)	33,	00	16,0	00	8,0	0	4,0	00	4,0	0	4,0	0	4,0	0
DIOCALINI AND LIFTO		g	19,	239	23,	168	9,12	20	9,2	272	3,2	56	3,2	52	3,4	40
DISCOUNT ON PALLETS yes yes yes yes yes yes	DISCOUNT ON PAL	LETS	yes		yes		yes		yes	3	yes		yes		yes	
SURCHARGE 1) yes yes yes yes yes yes yes	SURCHARGE 1)		yes	3	yes		yes		yes	S	yes		yes		yes	


PG = Price group (please see price list 2023) 1 = Minimum quantity: each open box will incur a surcharge. 2 = The marked trim pieces are to be used in accordance with the applicable instructions for use from Ströher GmbH as well as applicable standards and informational leaflets. For further information please see catalogue page 66 or visit our website under www.stroeher.de 3) = The 340 mm tread depth of the loft stair tread corner and tread tile allows flexible use and adjustment, even for non-standard stairs. 4) = Matching cove base internal corner and cove base external corner to the cove base can be found in the Stalotec range on page 116.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

* Ströher grants a 25-year guarantee on frost resistance for the following selected coarse ceramic products and series when laid professionally by a qualified specialist company: Roccia Next, Selected, Gravel Blend, Epos, Aera, Roccia, Terra, Stalotec, Farbklang, Nuancist, Brickwerk, Wasserbrand, Kontur, Riegel 50, Steinlinge, Glanzstücke, Zeitlos und Keravette.







0125 patrician red

0127 patrician red flashed

0116 wheat

STAIR TREAD TILE	STAIR TREAD CORNER	RISER CORNER	STAIR SKIRTING LEFT	STAIR SKIRTING RIGHT	SKIRTING	COVE BASE 4)
25	30	-	-	-	25	25
240 x 340 x 12	345 x 345 x 12	157 x 60 x 60 x 11	294 x 73 x 10	294 x 73 x 10	240 x 73 x 10	240 x 96 x 12
R 11/B	R 11/B	-	-	-	-	-
≤ 275 mm³	≤ 275 mm³	-	-	-	-	-
no	no	no	no	no	no	no
PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE	PG ARTICLE
95003-024	95003-027	95003-042	95003-033	95003-036	95003-030	
5 95003-025	² 95003-028	∞ 95003-043			S 95003-031	
95003-026	95003-029	95003-044	95003-035	95003-038	95003-032	S 95003-039
2,594	4,372	0,400	0,893	0,893	0,436	0,752
4	1	2	6	6	12	8
1,00	-	-	-	-	3,00	2,00
10,376	4,372	0,800	5,358	5,358	5,232	6,016
160	78	1.704	648	648	2.208	912
40,00	-	-	-	-	552,00	228,00
415	341	682	579	579	963	686
40	78	852	108	108	184	114
4,00	-	-	-	-	4,00	4,00
10,376	-	-	-	-	1,744	3,008
yes	no	no	no	no	no	no
no	no	no	no	no	yes	yes



























Completely frost resistant 25 year guarantee*

Fade-free and Colourfast Easy maintenance and hygienic

Anti-slip

In compliance with DIN EN

Ecofriendly

Anti-static



Mediterranean airiness. Unpretentious but strong in character.

Holiday atmosphere – 365 days a year. Application reliability for the balcony or terrace.

Vivacious in color and yet soothing in its appearance. A special glaze print creates a depth effect on the body, giving the otherwise rather Mediterranean pastel surface also a touch of southern wildness.

The special angle tile and the extruded body ensure that "Cavar" is perfectly suitable for outdoor use. Sophisticated in its Mediterranean appeal - but reliable in its application.


CAVAR

THIRD-PARTY VERIFIED EPD ISO 14025 and EN 15004

Extruded. Mediterranean. Expressive.



1618 facello



1685 fosco



1625 passione



































Frost resistance 25 year guarantee*



Mechanical adhesive qualities for a safe and permanent bonding.



Ideal for renova-tions of balconies, terraces and outdoor stairs.



For a perfect floor concept. Stairs, steps and edge finishes.





Sustainable Energy-efficiently building material.

CAVAR product details

DIN EN 14411 stoneware tile, extruded test result precision

		EXTRUDED STONEWARE TILE			GLE TILE ²		AIR TREAD E ^{2) 3)}	SKIRTING		
NOMINAL S	IZE IN CM	30	x 30	30		30		30		
PRODUCTIO	ON SIZE IN MM	29	4 x 294 x 8	29	4 x 115 x 52 x 8	29	4 x 340 x 12	29	4 x 70 x 8	
SLIP RESIST	TANCE	R 1	0/A	R 1	0/A	R 1	0/A	-		
LOAD GROU	JP	5 3)		5 3		5 3	l	-		
CALIBRATE	D	no		no		no		no		
COLOUR			PG ARTICLE		ARTICLE	PG	ARTICLE	PG	ARTICLE	
1673	1673 CHIARO		95018-002		95018-010		95018-025		95018-014	
1618	1618 FACELLO		95018-003		95018-011	82	95018-026		95018-015	
162	5 PASSIONE	96	95018-004	9926	95018-012	9982	95018-027	9952	95018-016	
168	5 FOSCO 3)	95018-005			95018-013		95018-028		95018-017	
PIECE	kg	1,510		0,8	51	3,0	44	0,3	77	
	Piece	11		6		4		18		
BUNDLE	m²/lm	1,0	0	1,8	2	1,2	1	5,45		
	kg	16,	610	5,1	06	12,	176	6,7	86	
	Piece	70	1	570	3	160)	3.2	40	
PALLET	m²/lm	64,	00	174	,55	48	48	98	1,82	
FALLET	kg	1.0	63	49)	48	7	1.2	21	
	Bundle	64		96		40		180)	
M ² /LM	Piece (incl. joint)	11,0	00	3,3	0	3,3	0	3,3	0	
IVI ⁻ / LIVI	kg	16,	610	2,8	08	10,	045	1,2	44	
DISCOUNT	ON PALLETS	yes		yes		yes	3	no		
SURCHARG	E 1)	yes		yes		no		yes		

PG = Price group (please see price list 2023) 1) = Minimum quantity: each open box will incur a surcharge. 2) = The marked trim pieces are to be used in accordance with the applicable instructions for use from Ströher GmbH as well as applicable standards and informational leaflets. For further information please see catalogue page 66 or visit our website under www.stroeher.de ³⁾ = Colour 1685 fosco meets loadgroup 4.

This is how it's done right!

APPLICATION INFORMATION FOR OUTSIDE FLOORING AND OUTSIDE STAIRS



Ceramic coverings in outdoor areas must be executed professionally in accordance with the following codes of practice and standards:


- ZDB bulletin "Exterior coverings: Covering constructions with tiles and slabs outside buildings",
 August 2019 edition
- · DIN 18531 Waterproofing of roofs as well as balconies, loggias and arcades
- · DIN 18195 Waterproofing of structures

The recommendation listed here is exemplary and serves only as a simplified, schematic visualisation. Complaints resulting from improper installation cannot be settled by the manufacturer.







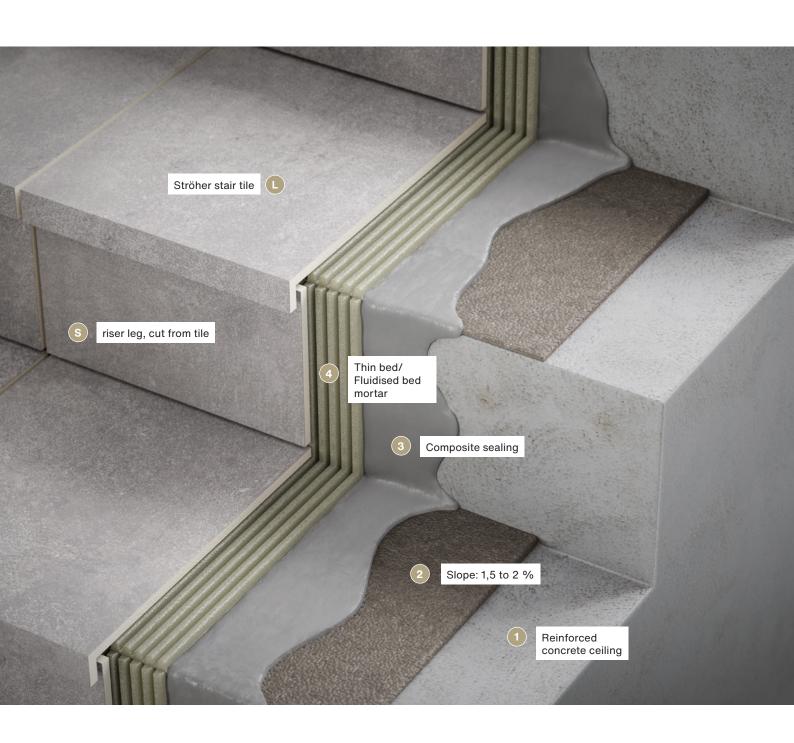

Stairs outdoors and flooring edge finishes with angles, florentines or loft stair tread tiles are further to be used as follows:





To ensure safe stair construction, the riser leg lead is to be positioned behind the stair tread or angle with a gap of 3–4 mm and they are not to be grouted together. Outdoors, the application and grouting of both the stair tread in connection to the riser leg leads to damage for constructional reasons.



THE
STRÖHER
GROUP.
SIGNATURE
CERAMICS
AND CLINKER.